

Notes:

Concrete blocks f'_{cc} 15 MPa


Mortar M3 (1:5: + methyl cellulose water thickener)

Concrete grout N20 (minimum cement 300 kg/m³ , Maximum aggregate 10 mm)

Reinforcement shall be held in position by

- steel ligatures; or
- steel hangers; or
- plastic wheel type support

(see Steel Positioning Detail)

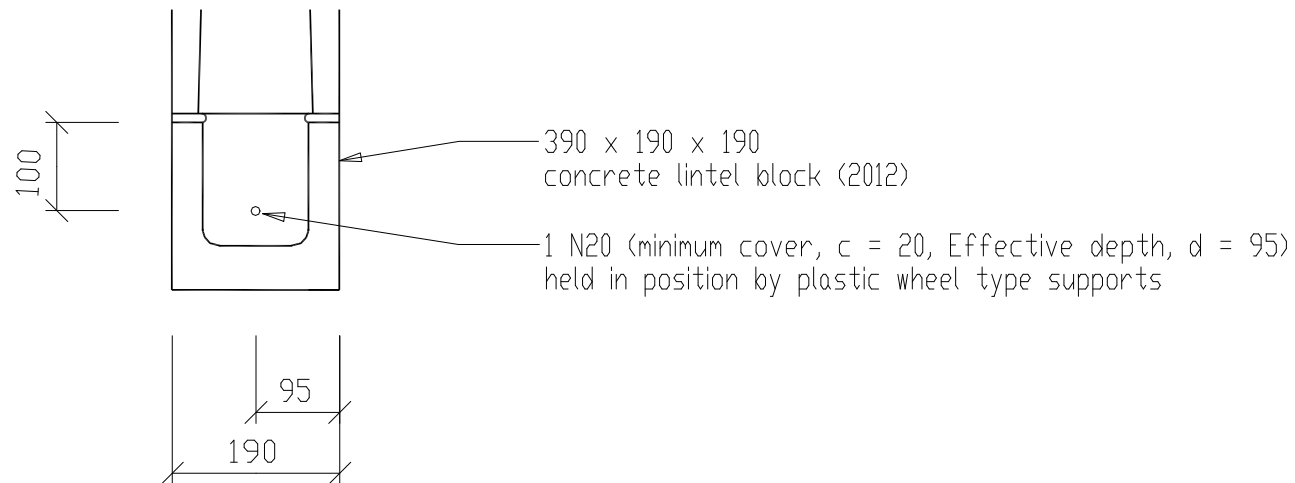

Reinforced Concrete Masonry Lintel Manufactured By Island Block & Paving

Scale 1:10