




SUPERBRICKS

“SUPERBRICKS”... The first choice for rendered homes, lightweight, cost efficient, easy to use with a unique core configuration. The standard brick width of 110mm provides excellent bond strength. Manufactured with sustainable lightweight aggregates to make the bricklayer’s job so much easier and quicker...

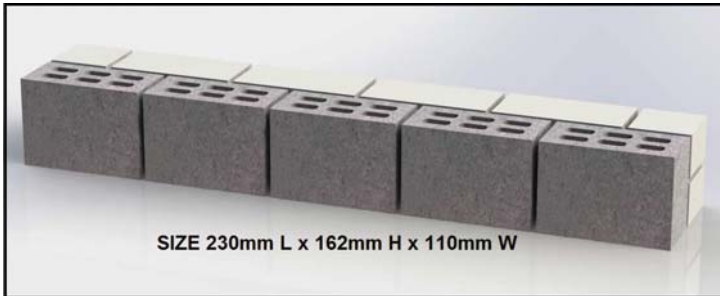

FAST FACTS

- Quick to lay, only 4.4kg each = cost effective
- Guaranteed 25% lighter than clay
- 25% lower freight costs
- Bricklayer friendly, made with ¼ ½ ¾ breakers
- Lower OHS site risks, no silica dust emissions
- Guaranteed for dimensional accuracy
- Excellent render substrate provided



TECHNICAL DATA

Characteristic Compressive Strength:	> 8 MPa
Durability Class:	General Purpose
Average Dry Mass:	4400 g, 4.4 kg
Number per Square Meter:	25 Units
Number per Pallet:	350 Units
Fire Resistance:	120 mins
Working Dimensions AS 4455.1 2008:	+ or - 2mm Dimensional Tolerance
Recommended Mortar per AS2758.1:	1 Part GP Cement + 1 Part Lime + 6 Parts Clean Sand

CONTACTS

ISLAND BLOCK & PAVING
16525 Midland Highway,
Breadalbane,
Tasmania 7300

ISLAND BLOCK & PAVING
41 Howard Road,
Glenorchy,
Tasmania 7010

ISLAND BLOCK & PAVING
8 Metrolink Cct,
Campbellfield,
Victoria 3061

ISLAND BLOCK & PAVING
24/7 Display Only
16 River Road,
Wivenhoe, Tasmania 7320

TASMANIA

VICTORIA

SOUTH AUSTRALIA

NEW SOUTH WALES

QUEENSLAND

DISTRIBUTOR LIST: islandblock.com.au/distributors

FREECALL 1800 004 499

Email: sales@islandblock.com.au
islandblock.com.au



“No one knows Blocks and Pavers better”