




SUPERBRICKS

“SUPERBRICKS”... The first choice for rendered buildings, lightweight, cost efficient, easy to use with a unique core configuration. The standard brick width of 110mm provides excellent bond strength for render or texture coatings. Manufactured with sustainable lightweight aggregates to make the bricklayer’s job so much easier and quicker...

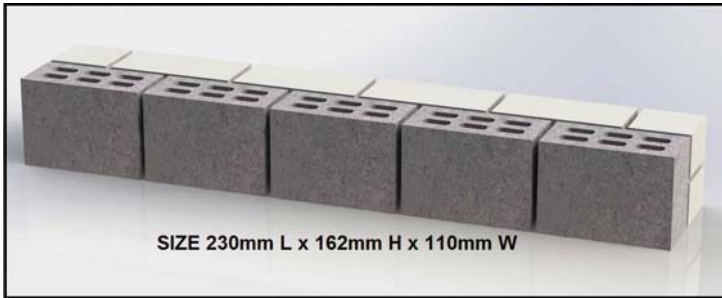

FAST FACTS

- Quick to lay, only 5.5kg each = cost effective
- Guaranteed 25% lighter than clay
- 25% lower freight costs
- Bricklayer friendly, made with ¼ ½ ¾ breakers
- Lower OHS site risks, no silica dust emissions
- Guaranteed for dimensional accuracy
- Excellent render substrate provided



TECHNICAL DATA

Characteristic Compressive Strength:	> 10 MPa
Average Dry Mass:	5500 g, 5.5 kg, 182 per tonne
Number per Square Meter:	25 Units
Number per Pallet:	350 Units
Fire Resistance, Insulation:	120mins
Working Dimensions AS 4455.1 2008:	+ or - 2mm Dimensional Tolerance
Recommended Mortar per AS2758.1:	1 Part GP Cement + 1 Part Lime + 6 Parts Sand

PRICING inc GST | MAY 2023

230mm L x 162mm H x 110mm W Natural Lightweight \$1.80 each

CONTACTS

ISLAND BLOCK & PAVING

16525 Midland Highway,
Breadalbane,
Tasmania, 7300

ISLAND BLOCK & PAVING

41 Howard Road,
Glenorchy,
Tasmania, 7010

ISLAND BLOCK & PAVING

8 Metrolink Cct,
Campbellfield,
Victoria 3061

ISLAND BLOCK & PAVING

24/7 Display Only
16 River Road,
Wivenhoe, Tasmania 7320

TASMANIA

VICTORIA

SOUTH AUSTRALIA

NEW SOUTH WALES

QUEENSLAND

DISTRIBUTOR LIST: islandblock.com.au/distributors

freecall 1800 004 499

email: sales@islandblock.com.au

islandblock.com.au



“No one knows Blocks and Pavers better”

