




SUPERBRICKS

“SUPERBRICKS”... The first choice for rendered homes, lightweight, cost efficient, easy to use with a unique core configuration. The standard brick width of 110mm provides excellent bond strength. Manufactured with sustainable lightweight aggregates to make the bricklayer’s job so much easier and quicker...

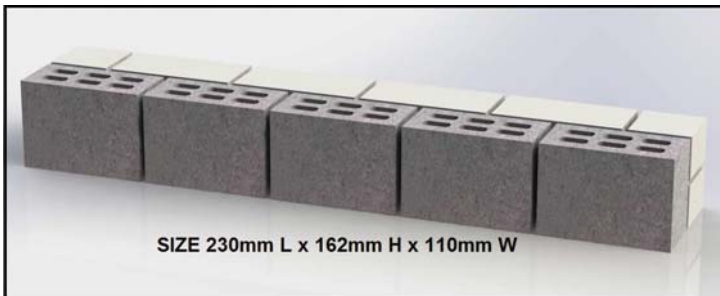

FAST FACTS

- Quick to lay, only 4.4kg each = cost effective
- Guaranteed 25% lighter than clay
- 25% lower freight costs
- Bricklayer friendly, made with ¼ ½ ¾ breakers
- Lower OHS site risks, no silica dust emissions
- Guaranteed for dimensional accuracy
- Excellent render substrate provided



TECHNICAL DATA

Characteristic Compressive Strength:	> 8 MPa
Durability Class:	General Purpose
Average Dry Mass:	4400 g, 4.4 kg
Number per Square Meter:	25 Units
Number per Pallet:	350 Units
Fire Resistance:	120 mins
Working Dimensions AS 4455.1 2008:	+ or - 2mm Dimensional Tolerance
Recommended Mortar per AS2758.1:	1 Part GP Cement + 1 Part Lime + 6 Parts Clean Sand

HEAD OFFICE

ISLAND BLOCK & PAVING
Midland Highway,
Breadalbane, Tasmania 7300

Phone: (03) 6398 2088

ISLAND BLOCK & PAVING
41 Howard Road,
Glenorchy, Tasmania 7010

Phone: (03) 6224 4477

DISPLAY CENTRES

MELBOURNE BRICK
227 Princes Highway,
Hallam Victoria 3803

MELBOURNE BRICK
330 Tooronga Road,
Glen Iris, Victoria 3146

MELBOURNE BRICK
443 Mountain Highway,
Bayswater, Victoria 3153

MD BRICK
40 Eddie Road,
Minchinbury NSW 2770

MD BRICK
9 Dyer Crescent,
West Gosford NSW 2250

AMBER TILES
104 Windsor Road,
Kellyville, NSW 2155

AUSTRALIAN PAVING
3 Oborn Road,
Mount Barker SA 5251

TYRONE GROUP
102 Erindale Road,
Balcatta WA 6021

AMBER TILES
8 Yallourn Street,
Fyshwick ACT 2609



FREECALL 1800 004 499

email: sales@islandblock.com.au
islandblock.com.au



“No one knows Blocks and Pavers better”